


TECHNICAL SPECIFICATION

Pilot/Production Scale Continuous Carousel Filter Dryer AWL CCFD50

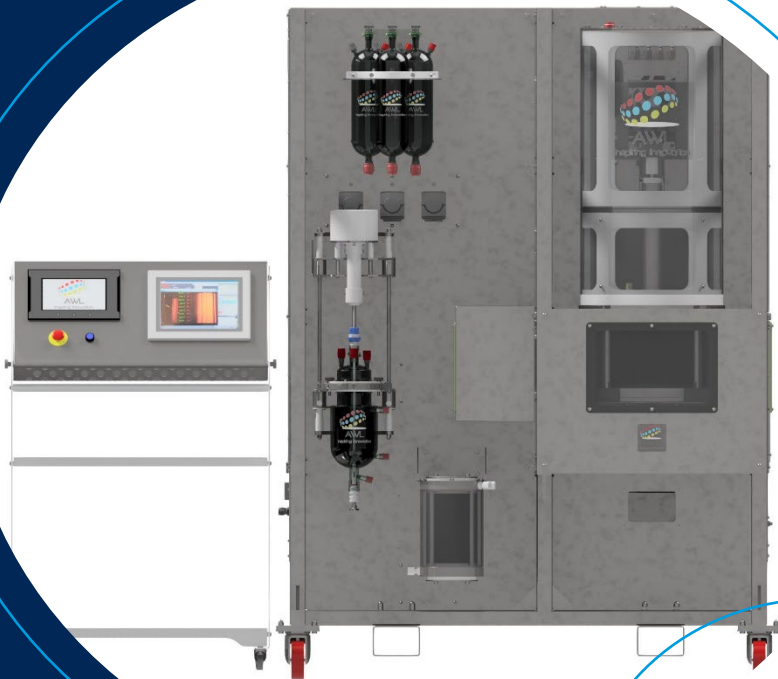

System:

The AWL Continuous Carousel Filter Dryer “CCFD” has been designed to produce filtered, washed, and dried products in a continuous manner. The core technology is based on well-established Nutsche filtration, processing thin cakes in a fully automated system. The carousel is a series of hollow cylinders moved around a central axis to fixed processing stations. The CCF is supplied complete with all valves, pumps and vessels to allow for fully continuous operation, the user merely needs to connect to their vacuum and compressed air supplies and drying gas supply if required.

The standard supply consists of a support structure with the following main components; slurry buffer tank, solvent wash tank (x2), wash solvent pumps (x2), Wash-in-Place “WIP” tank, WIP pump, combined carousel filter/dryer, filtrate receiver (x1), drying solvent/WIP Receiver, solids discharge chute terminated with a tri-clamp outlet flange, and a PLC / touch screen control system. The filter carousel consists of ten 50 mm diameter, 400 ml capacity filtration chambers. The carousel and filter base has been designed to be easily removed for thorough manual cleaning if required.

This system is designed for use in a safe area and is not suitable for an ATEX environment.

Carousel Filtration and Drying:

The DN50 CCFD is a pilot/production scale continuously operating filter dryer. It is capable of automatic filtering, washing (with two different solvents), deliquoring, drying and discharge of filtered dry solids. Integrated wash-in-place (WIP) is included. Solid-liquid separation is done using a vacuum over a sintered multilayer filter plate. Industrial standard multilayer filter plate material is available in various micron ratings, from 2 to 40 microns. The system operates by applying vacuum to all filtration chambers simultaneously, deliquoring the cake in each port. Filtration and washing control are based on calibrated pump times and vacuum times. Drying is achieved through a heated nitrogen system.

Warm Nitrogen/Air Drying:

The flow and temperature of the drying gas are controlled using the following:

- N₂ heated by AWL’s electric heated transfer line technology.
- Maximum jacket temperature 100°C
- PID loop control
- Inlet & outlet temperatures measured by K-Type thermocouples (displayed on HMI)

Functionality:

All automatic functions are controlled via the HMI touchscreen and can be adjusted to suit different chemistries.

The following functions are included in the supply:

- Adjustable filtration, wash and drying cycle.
- Auto transfer function from external reactor/crystalliser
- Auto wash solvent dosing systems (x2)
- Auto WIP dosing system
- Heated Nitrogen/Air drying with temperature control.
- Filtrate receiver and WIP Receiver with auto-drain feature
- Auto data population, recall and presentation.
- Auto WIP sequence
- End-of-Day automated cleaning routine

Process Sequence:

First, the slurry is transferred from the jacketed, agitated buffer vessel into a charge vessel via vacuum transfer. This slurry is then dispensed into the first port of the carousel for processing. The carousel rotates through ten stations where different processes are completed following a user-programmable sequence.

The carousel rotation is controlled by a servo motor which indexes the carousel ports to fixed processing stations. The process sequence for each port position is as follows:

- Port Position 1: Solid-liquid separation
- Port Position 2: 1st Wash with either Solvent 1 or Solvent 2
- Port Position 3: 2nd Wash with either Solvent 1 or Solvent 2
- Port Position 4: 3rd Wash (optional) with either Solvent 1 or 2, and deliquor
- Port Position 5-9: Drying via heated nitrogen or air.
- Port Position 10: Cake Discharge

Wash Solvent 1: Removes impurities.

Wash Solvent 2: Solvent exchange, for instance, to reduce drying time or agglomeration

Modes of Operation:

- Production Mode: Maximum throughput operation including automatic solid-liquid separation, dosing of wash solvents and drying
- Manual Mode: All valves, pumps and operations can be controlled manually via the touchscreen control panel
- End-of-Day WIP: The filter internals can be cleaned by an automated wash-in-place sequence which sprays the carousel filter using the WIP pump system. The filter system is flooded and drained to remove residual material.

Interfacing with upstream processing:

The filtration system is designed to accept slurry from a batch or continuous source. It can operate as a stand-alone unit or interface directly with a reactor or crystalliser. Valves are included within the standard scope of supply to allow for a controlled automatic transfer from many diverse types of crystallised reactors. Transfer volumes and intervals can be specified by the user.

Process Vessels:

The following process vessels are provided with the system.

- 2 Litre capacity jacketed, agitated slurry buffer vessel
- 450 ml capacity jacketed slurry dosing vessel
- 2 Litre capacity Wash Vessels (x2) complete with peristaltic pump.
- 2 Litre capacity WIP Vessel complete with peristaltic pump.
- 3.5 Litre capacity Filtrate Receiver vessel
- 3.5 Litre capacity WIP Receiver vessel

Vessels are manufactured from borosilicate 3.3 glass.

The 3.5 L capacity receiver vessels function as a buffer for the filtrate and wash waste from the system. The auto drain sequence is managed by the onboard control system. It is the end user's responsibility to connect the receiver outlets to the appropriate waste/collection stream.

PLC / Control System:

The control system consists of a pre-programmed PLC system, a 9" touch screen, safety circuits and a power isolator. Controls are enclosed within the framework of the Carousel Filter Dryer and the HMI touch screen is housed in a separate Local Operating Panel. DCS remote access / Control is available.

Support Structure:





The CCFD and ancillary process vessels are mounted on a self-supporting 304 stainless steel mobile framework and mounted on four castors. Utility connections (compressed air, vacuum, nitrogen(optional), and electrical supply) are provided on the side of the structure.

Overall Dimensions / Weight:

Approximate Weight:	800 kg (complete system)
Dimensions:	1600mm Wide x 1400mm Deep x 2400 mm High


The above dimensions are the footprint of the filter unit.
A minimum of 1700 mm x 1500 mm is advised to allow the connection of services.

THE GENERAL ARRANGEMENT OF THE CCFD50

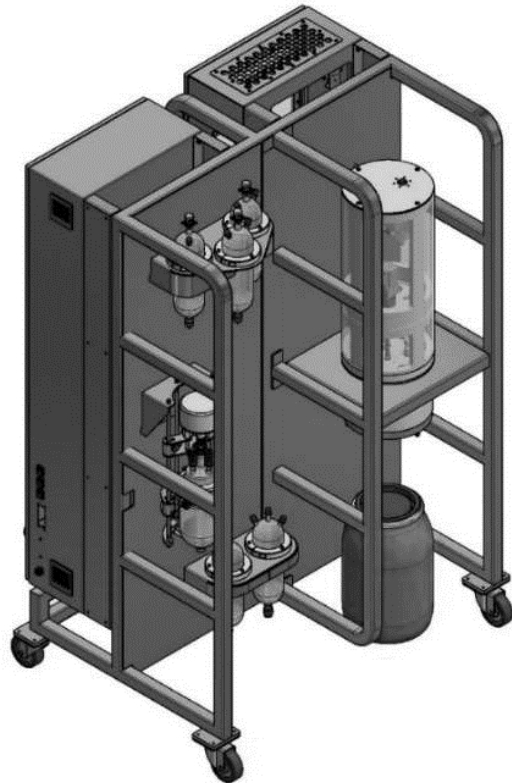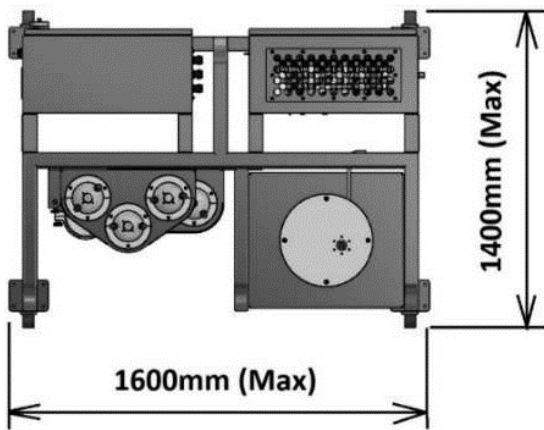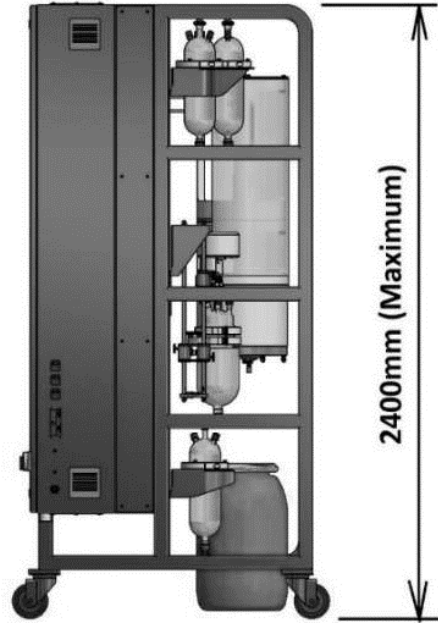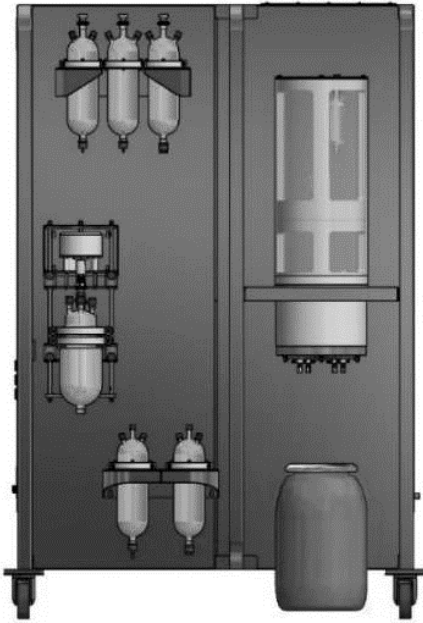

(Blue solids collection vessel is for information only)

SYSTEM CONFIGURATION

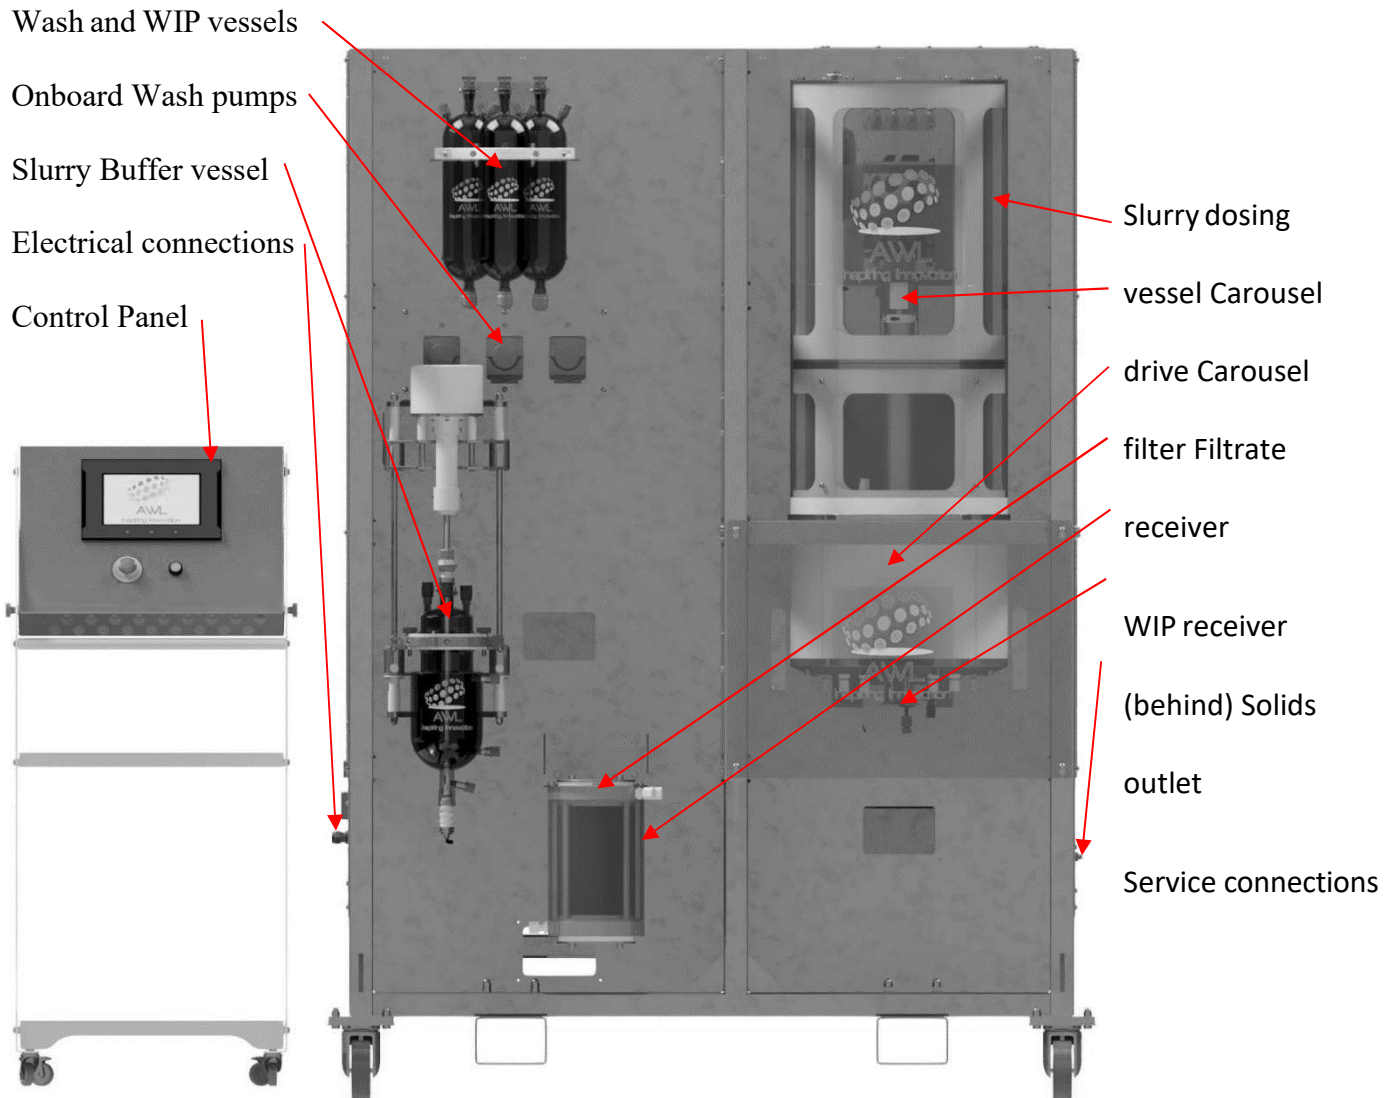

Typical configuration of a CCFD50

PROCESS SECTION - OPERATING PARAMETERS & DESIGN CRITERIA:

Filter:

Temperature Range:	-20°C to +100°C
Design Pressure:	-1.0 bar to +50 mbar
Material of Construction: plates (standard)	Wetted parts - 316L, PTFE, Polypropylene, PEEK, FEP Filter Sintered Mesh 20-micron, 5 layers, 316L (Alternative sizes and materials on request)

Process Vessels:

Temperature Range:	-20°C to +100°C
Design Pressure:	-1.0 bar to +50 mbar
Material of Construction:	Borosilicate 3.3 Glass

Process Valves and Pipework:

Process Valves:	Wetted parts: PTFE / PEEK, FFKM, 316L
PPipework	FEP, PTFE
Fittings:	PFA, PTFE, Polypropylene, 316 L

Typical flow rates:

Typical Slurry flow rate:	From 15 l/hr to 30 l/hr slurry (Chemistry dependent)
Typical Solids throughput:	From 3 to 6 kg/hr dried solids (Chemistry dependent) (Based on 20% Solid Loading)

Service Requirements:

Electrical Specifications:	1 phase, N and Bonded Earth, 230 Volts, 50 Hz, 16 Amps (Local geographical variations to be discussed)
Compressed Air specifications:	4-6 bar compressed air @ 10 l/min
Vacuum Specifications:	2 independent vacuum supplies capable of >900 mbar vacuum. One with >500 L/min flow rate, one with >20 L/min flow rate, both with condenser and solvent compatible pump.
Nitrogen Specifications (optional):	550 L/min in production mode (depending on drying and filterability of processed material) All

Utility connections are provided on the side of the structure.

NOTES: - All pressures in this document are stated as a bar gauge

- Flow rates are chemistry dependent.
- Carousel is not actively cooled; filtration, washing, and de-liquoring take place at ambient temperatures.
- Alternative wetted parts can be made available to suit user chemistry.

DOCUMENTATION PACK:

Each filter is supplied with two sets of documents (one hard and one electronic) consisting of the following:

- Operation and Maintenance Manual
- Engineering Drawings / Parts Lists
- Electrical Schematics
- OEM manuals for non-proprietary equipment
- Declaration of Conformity
- Safety documentation

STANDARDS AND DIRECTIVES:

As a minimum all the AWL Carousel Filter ranges are designed and built to meet the following standards, others are available on request:

2014/35/EU:	Low Voltage Directive
2014/30/EU:	Electromagnetic Compatibility Directive
EN 13849-1:	2015 Safety of Machinery – Safety-related parts of control systems
EN ISO 12100:	2010 General principles for design. Risk assessment & Risk Reduction
EN 61000-6-4:	2007 Generic Immunity Standard – Industrial Environment
EN 61000-6-6:	2003 Generic Emission Standard – Industrial Environment

OPTIONS:

The following options can be added to the unit if specified at the time of order:

- Nitrogen Blanket System: Includes low-pressure regulator and valves to control nitrogen blanketing.
- Materials of construction: Various available, particularly wetted parts.
- Dosing of slurry via tube-in-tube temperature-controlled transfer line. Available as a stand-alone product.
- Dosing of wash solvent via a liquid/liquid heat exchange ensuring that wash solvents are cool on arrival at the carousel filter.
- ATEX version of the CCFD50 is available.
- DCS control via OPC server
 - Provision is made for remote control and access to the relevant process information via a communication module. Our standard communication is achieved by using an OPC Server (KEPServer). All process-related signals, readings and data are accessible. Remote access to functions is limited to those deemed safe to operate without the presence of an operator at the filter operating panel.

WHO WE ARE

Alconbury Weston Ltd (AWL) are at the forefront of the design, manufacture & supply of Continuous Processing Technologies & Systems.

We truly live and breathe inspiring innovation. In the past 8 years, we have taken the much-talked-about and highly anticipated continuous processing theories and turned them into a reality for use in the Chemical, Food and Pharmaceutical Industries today.

“The advance in technology is based on making it fit in so that you don't even really notice it”.

Bill Gates

CONTACT US

Alconbury Weston Ltd
Oldfield House
Galveston Grove
Fenton
Stoke on Trent
Staffordshire, ST4 3PE.

Phone: (+44) 1782 413427

Email: enquires@a-w-l.co.uk

Web: www.a-w-l.co.uk

